

PROUDLY AUSTRALIAN AND CELEBRATING OVER 20 YEARS IN THE MARKET



A Hand Dryer solution for every project and every budget,
Metlam Australia has your requirements covered.

HAND DRYERS



PROUDLY
AUSTRALIAN
OWNED

OUR HAND DRYER RANGE INCLUDES
INNOVATIVE AUSTRALIAN DESIGNS



Celebrating over 20 years in operation, Metlam is a proud wholly Australian owned and managed company specialising in the manufacture of quality Commercial Washroom Accessories and Toilet Partition Hardware for the commercial, residential, hospitality, health, science, care, education, security and public facilities markets.

OUR HAND DRYERS

Metlam Australia has a range of fast, efficient, functional and cost-effective hand dryers for every project requirement. Our range includes elements of innovative Australian design and local assembly - from slimline contemporary designs through to ultra-efficient automatic high velocity drying. You can't go past Metlam Australia Hand Dryers to address any commercial washroom Hand Dryer requirement.

OUR PRODUCTS ARE SUITABLE FOR:



COMMERCIAL / INDUSTRIAL FACILITIES



RESIDENTIAL FACILITIES



EDUCATIONAL FACILITIES



ACCESSIBLE COMPLIANT



PUBLIC FACILITIES



HEALTH AND AGED CARE / RESEARCH FACILITIES



HOSPITALITY AND LEISURE FACILITIES


HIGH SPEED HAND DRYER SOLUTIONS

EcoMo Auto Operation High Speed Hand Dryer

EcoMo is an ergonomic, auto operation high speed hand dryer. Offering a comfortable, natural drying position, users can effectively dry their hands without water splash-back. EcoMo is an ideal solution for high traffic washrooms, with its absorbent, ceramic pad that prevents water overflow. Unlike other vertical hands-in dryers, the drying area is the perfect size for hands without losing drying efficiency. EcoMo's anti-bacterial protection cover and super HEPA filter, which eliminates over 99% of any present bacteria gives users extra protection against harmful bacteria.



ML_ECOMOROUND_SIL

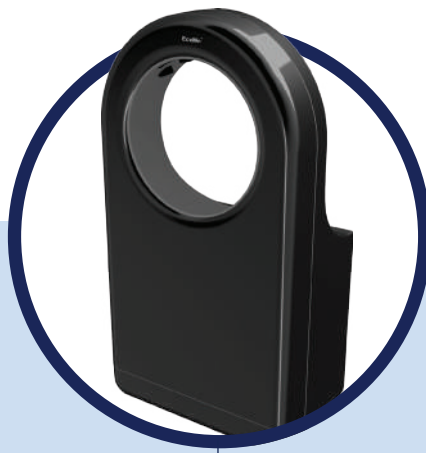


ML_ECOMOROUND_BLK



ML_ECOMOROUND_WHT

SPECIFICATIONS

Cover	Antibacterial ABS Cover available in Silver, Black and White
Drying Time	10-15 seconds
Operating Voltage	220V-240Vac, 50/60 Hz, 1.34-1.6k
Standby Power	0.3-0.4W
Timing Protection	60-second auto shut off
Sound Level	MIN 72.2dB to 75.4 dB MAX @ 1 m
Air Speed	75-90 m/s (169-202 mi/hr), adjustable
Sensing range	170 mm ± 20 mm, adjustable
Drip Proof	IP21
Unit size	322mm (W) x 624.5mm (H) x 185mm (D)
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)

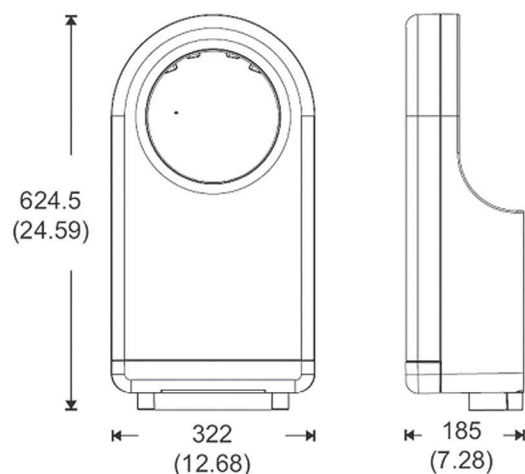

Safety Approvals



Green Certificates



* This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.


ML 100N SS

Slimline Automatic Operation Hand Dryer

ML_100N_SS SPECIFICATIONS

Material	1.2mm #304 Satin Stainless Steel
Motor	1/4 HP, 7500 rpm, Brush Type, Dual Ball Bearings Motor, Thermal Protection- Auto Resetting Thermostat turns off at 105°C
Power Use	230-240 Vac, 50/60Hz, 2200-2400W
Sound Level	70db (+/- 3)
Drying Time	Less than 15 seconds
DP Rating	IPX 1
Element	2200W @ 240VAC
Heater	87°C auto resetting thermostat, 141°C auto reset safety cut off
Warm Air	Output: 314.5m ³ /h (185 CFM), Temp: Ambient +20°C
Protection	60 sec power cut off, auto reset
Timing	2 sec delay turn off after last read
Sensor/Range	Adjustable, standard 18cm ± 2cm
Case Security	2 SS theft resistant hex drive screws (hex key supplied)
Net Weight	4.5kg
Dimensions	268mmW x 283mmH x 100mmD
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Note	Unit can be hard wired by electrician or used with cord and plug provided

* This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.

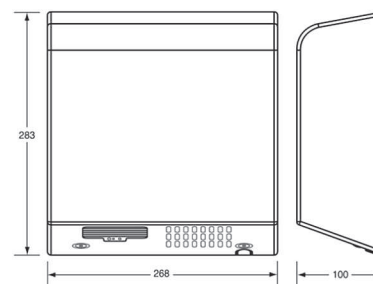

Safety Approvals




ML ECLIPSE DESIGNER

Slimline Automatic Operation Hand Dryer

ML_ECLIPSE_DESIGNER SPECIFICATIONS

Material	1.2mm Designer Matte Black Powder Coat Steel
Features	Patented high-flow dual air outlets
Motor	250-500W Brush Type: Dual Ball Bearings, 16,000-29,000 RPM, 95°C auto reset overload
Power Use	220-240V, 50Hz, 1000W
Sound Level	72 DB (+-3) @1M
Drying Time	Less than 15 seconds
DP Rating	IP 24
Element	325 - 500W, adjustable
Heater	Auto resetting thermostat turns unit off at 85°C
Warm Air	Speed: 95-115m/s (adjustable), Temp: Ambient +25°C
Protection	60 sec power cut off, auto reset
Sensor/Range	Infrared Automatic - 152mm +/-20mm preset, Blue LED indicates operation/range
Case Security	2 SS theft resistant hex drive screws (hex key supplied)
Net Weight	4.2kg
Dimensions	220mmW x 287.9mmH x 100mmD
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Note	Unit can be hard wired by electrician or used with cord and plug provided

* This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.

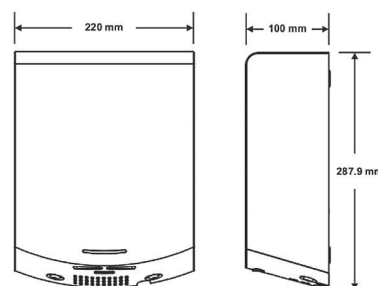


Safety Approvals



Green Certificates



WEEE RoHS

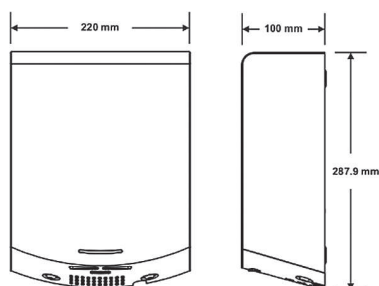

Safety Approvals



Green Certificates



WEEE RoHS


ML ECLIPSE05 SS

Slimline Automatic Operation Hand Dryer

ML_ECLIPSE05_SS SPECIFICATIONS

Material	1.2mm #304 Satin Stainless Steel
Features	Patented high-flow dual air outlets
Motor	250-500W Brush Type: Dual Ball Bearings, 16,000-29,000 RPM, 95°C auto reset overload
Power Use	220-240V, 50Hz, 1000W
Sound Level	72 DB (+3) @1M
Drying Time	Less than 15 seconds
DP Rating	IP 24
Element	325 - 500W, adjustable
Heater	Auto resetting thermostat turns unit off at 85°C
Warm Air	Speed: 95-115m/s (adjustable), Temp: Ambient +25°C
Protection	60 sec power cut off, auto reset
Sensor/Range	Infrared Automatic - 152mm +/-20mm preset, Blue LED indicates operation/range
Case Security	2 SS theft resistant hex drive screws (hex key supplied)
Net Weight	4.2kg
Dimensions	220mmW x 287.9mmH x 100mmD
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Note	Unit can be hard wired by electrician or used with cord and plug provided

* This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.

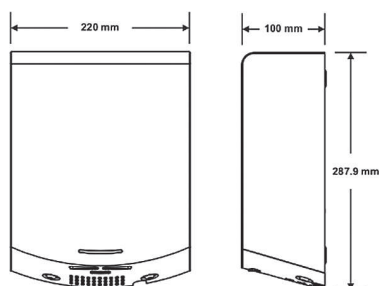

Safety Approvals



Green Certificates



WEEE RoHS

ML ECLIPSE01 WHT

Slimline Automatic Operation Hand Dryer

ML_ECLIPSE01_WHT SPECIFICATIONS

Material	1.2mm White Powder Coat Steel
Features	Patented high-flow dual air outlets
Motor	250-500W Brush Type: Dual Ball Bearings, 16,000-29,000 RPM, 95°C auto reset overload
Power Use	220-240V, 50Hz, 1000W
Sound Level	72 DB (+3) @1M
Drying Time	Less than 15 seconds
DP Rating	IP 24
Element	325 - 500W, adjustable
Heater	Auto resetting thermostat turns unit off at 85°C
Warm Air	Speed: 95-115m/s (adjustable), Temp: Ambient +25°C
Protection	60 sec power cut off, auto reset
Sensor/Range	Infrared Automatic - 152mm +/-20mm preset, Blue LED indicates operation/range
Case Security	2 SS theft resistant hex drive screws (hex key supplied)
Net Weight	4.2kg
Dimensions	220mmW x 287.9mmH x 100mmD
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Note	Unit can be hard wired by electrician or used with cord and plug provided

* This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.


ML ECOSLENDER05 SS

Slimline Eco Automatic Operation Hand Dryer

ML_ECOSLENDER05_SS SPECIFICATIONS

Material/Finish	1.2mm #304 Satin Stainless Steel
Features	Contemporary curved design, Patented high-flow dual air outlets
Motor	Brush Type, Dual Ball Bearings, 16,000-29,000 RPM, 95°C auto reset overload
Power Use	240V, 50Hz, 1000W, 4.17A
Sound Level	68.9dB - 74.3dB (Adjustable)
Drying time	Less than 15 seconds
DP Rating	IP 24
Element	325W - 500W (Adjustable)
Heater	ON/OFF Heating Options, 85°C auto resetting thermostat, 142°C auto reset safety cut off
Warm Air	Speed: 45.5-70m/s (adjustable), Temp: Ambient +25°C
Protection	60 sec power cut off, auto reset
Sensor/Range	Infrared Automatic, Self Adjusting, 170mm+/-20mm, Blue LED indicates operation/range
Case Security	2 SS theft resistant hex drive screws (hex key supplied)
Net Weight	3.8kg
Dimensions	275.5mmW x 216mmH x 100mmD
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Note	Unit can be hard wired by electrician or used with cord and plug provided

* This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.

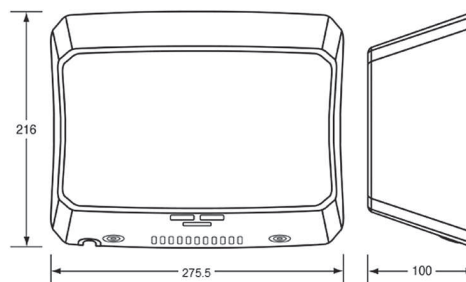

Safety Approvals



Green Certificates




ML ECOSLENDER01 WHT

Slimline Eco Automatic Operation Hand Dryer

ML_ECOSLENDER01_WHT SPECIFICATIONS

Material/Finish	1.2mm White Powder Coated Steel
Features	Contemporary curved design, Patented high-flow dual air outlets
Motor	Brush Type, Dual Ball Bearings, 16,000-29,000 RPM, 95°C auto reset overload
Power Use	240V, 50Hz, 1000W, 4.17A
Sound Level	68.9dB - 74.3dB (Adjustable)
Drying time	Less than 15 seconds
DP Rating	IP 24
Element	325W - 500W (Adjustable)
Heater	ON/OFF Heating Options, 85°C auto resetting thermostat, 142°C auto reset safety cut off
Warm Air	Speed: 45.5-70m/s (adjustable), Temp: Ambient +25°C
Protection	60 sec power cut off, auto reset
Sensor/Range	Infrared Automatic, Self Adjusting, 170mm+/-20mm, Blue LED indicates operation/range
Case Security	2 SS theft resistant hex drive screws (hex key supplied)
Net Weight	3.8kg
Dimensions	275.5mmW x 216mmH x 100mmD
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Note	Unit can be hard wired by electrician or used with cord and plug provided

* This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.

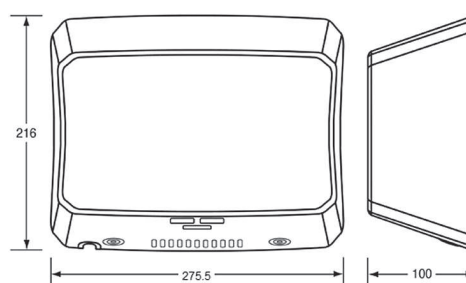


Safety Approvals



Green Certificates



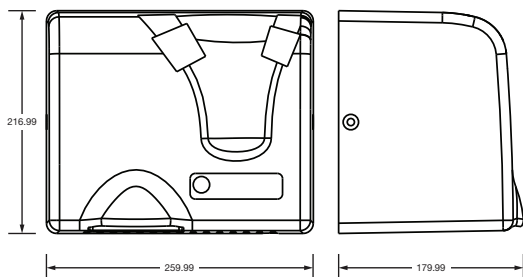

ML 1800 WHT

Automatic Operation ABS Hand Dryer

ML_1800_WHT SPECIFICATIONS

Casing	3.0mm White High Grade Fire Retardant ABS
Motor	80W Brushless, 2850 RPM, 105°C auto reset overload
Power Use	240V, 50Hz, 1800W, 7.50A
Sound Level	55db (+/- 3)
Drying Time	30-35 seconds
DP Rating	IPX 1
Heater	87°C auto resetting thermostat, 142°C auto reset safety cut off
Warm Air	Speed: 14.5m/s, Temp: Ambient +20°C
Protection	60 sec power cut off, auto reset
Timing	2 sec delay turn off after last read
Sensor/Range	Auto Infrared - 180mm +/-20mm preset, 100 - 300mm adjust
Case Security	2 SS theft resistant hex drive screws (hex key supplied)
Net Weight	3.5kg
Dimensions	259.99mmW x 216.99mmH x 179.99mmD
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Note	Unit can be hard wired by electrician or used with cord and plug provided

Safety Approvals



Green Certificates



WEEE RoHS



Warren Park Rugby League Stadium, NT



Optus Stadium, WA




Territory Netball Stadium, NT

ECLIPSE3IN1 REC D

Recessed Paper Towel Dispenser, Hand Dryer & Waste Receptacle

ML_ECLIPSE_3N1REC_D SPECIFICATIONS

Material/Finish	#304 Satin Stainless Steel
Features	Unit fitted with security lock, Seamless welds, rolled edges
Dispenser/Options	300 Interfold paper towels, 500 Interleaved paper towels
Hand Dryer	Eclipse Auto Dryer
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Motor	250-500W Brush Type, Dual Ball Bearings, 29,000 RPM, 95°C auto reset overload
Power Use	240V, 50Hz, 1000W
Power Supply	Hard wired - 4 electrical cable entry points available
Drying Time	Less than 15 seconds
DP Rating	IP 24
Heater	85°C auto reset safety cut off
Warm Air	Speed: 70m/s, Temp: Ambient +25°C
Protection	60 sec power cut off, auto reset
Disposal	21L Removable Stainless Steel waste container
Overall Size	318mmW x 1500mmH x 190mmD
Wall Opening	290mmW x 1472mmH x 192mmD
Note	Unit is to be hard wired by licensed electrician, Unit is supplied with 2 keys

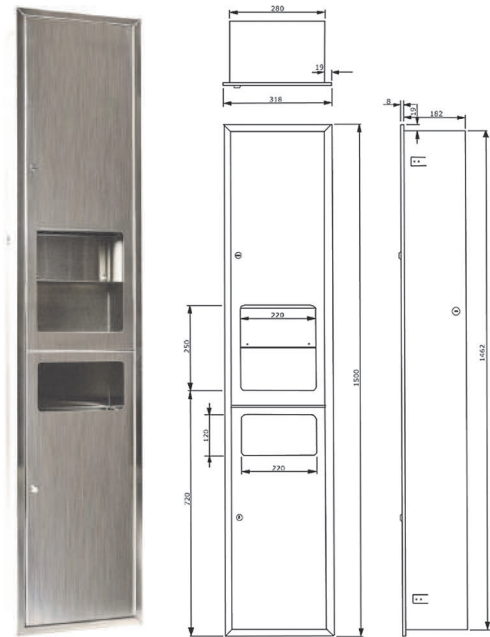

Safety Approvals



Green Certificates



WEEE RoHS

* This unit is accessible compliant when installed in accordance with AS1428.1. guidelines.



Ashmore City Shopping Centre, QLD




Ashmore City Shopping Centre, QLD



Ashmore City Shopping Centre, QLD



Gateway Shopping Centre, NT

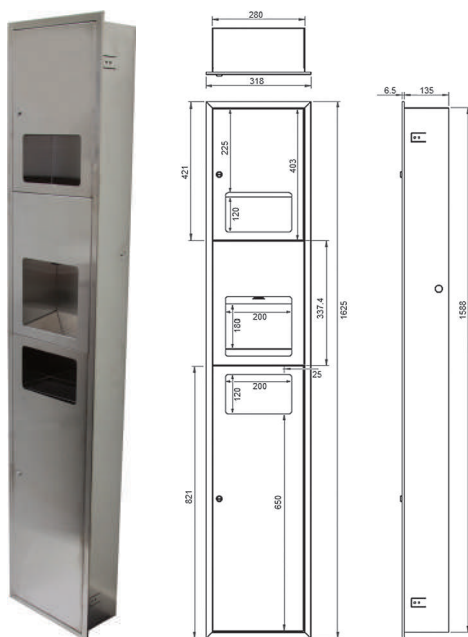**ML ECO 73N1REC**

Recessed Paper Towel Dispenser, Receptacle Hand Dryer & Waste

ML_ECO_73N1REC SPECIFICATIONS

Material/Finish	#304 Satin Stainless Steel
Features	Unit fitted with security lock, Full length piano hinge on doors, Seamless welds, rolled edges
Dispenser/Options	300 Interfold paper towels / 500 Interleaved paper towels
Hand Dryer	EcoFast Auto Dryer
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Motor	500W Brush Type: Dual Ball Bearings, 29,000RPM 105°C auto resetting safety overload thermostat
Power Use	240V, 50Hz, 1000W, 4.17A
Power Supply	Hard wired - 4 electrical cable entry points available
Drying Time	Less than 15 seconds
DP Rating	IPX1
Heater	85°C auto reset safety cut off
Warm Air	Speed: 90m/s - Temp: Ambient +30°C
Protection	60 sec power cut off, auto reset
Disposal	20L Removable Stainless Steel waste container
Overall Size	318mmW x 1625mmH x 141.5mmD
Wall Opening	290mmW x 1600mmH x 145mmD
Specify	Recessed
Note	Unit is to be hard wired by licensed electrician, Unit is supplied with 2 keys

Safety Approvals



Green Certificates



WEEE RoHS

**ML ECO 73N1SM**

Surface Mount Paper Towel Dispenser, Receptacle Hand Dryer & Waste

ML_ECO_73N1SM SPECIFICATIONS

Material/Finish	#304 Satin Stainless Steel
Features	Unit fitted with security lock, Full length piano hinge on doors, Seamless welds, rolled edges
Dispenser/Options	300 Interfold paper towels / 500 Interleaved paper towels
Hand Dryer	Eco Auto Dryer
Warranty	5 Years (3 Years Parts and Labour + 2 Years Parts only)
Motor	500W Brush Type: Dual Ball Bearings, 29,000RPM 105°C auto resetting safety overload thermostat
Power Use	240V, 50Hz, 1000W, 4.17A
Power Supply	Hard wired - 4 electrical cable entry points available
Drying Time	Less than 15 seconds
DP Rating	IPX1
Heater	85°C auto reset safety cut off
Warm Air	Speed: 90m/s - Temp: Ambient +30°C
Protection	60 sec power cut off, auto reset
Disposal	20L Removable Stainless Steel waste container
Overall Size	318mmW x 1625mmH x 141.5mmD
Specify	Surface Mounted
Note	Unit is to be hard wired by licensed electrician Unit is supplied with 2 keys

Safety Approvals



Green Certificates



WEEE RoHS



Optus Stadium, WA



Maryborough Highland Society, VIC



Marrara Tennis Centre, NT

Our Hand Dryers have been used in countless projects across market segments throughout Australasia. Metlam Australia has a Hand Dryer solution for every project and budget.



Marrara Tennis Centre, NT



Martial Arts Centre, Liverpool NSW



Melbourne Recital Centre, VIC



Territory Netball Stadium, NT



Mc Donalds, South Melbourne VIC



Melbourne Recital Centre, VIC



METLAM
A U S T R A L I A

For further information on our product range please contact us at:

1300 METLAM for all calls inside Australia

Head Office 17 Parkers Road, New Gisborne VIC 3438

T +61 3 5420 8800 **E** sales@metlam.com.au **metlam.com.au**

The technical recommendations contained in this document are necessarily of a general nature and should not be relied on for specific applications without first securing competent advice. Whilst Metlam Australia Pty Ltd has taken all reasonable steps to ensure the information contained herein is accurate and current, it does not warrant the accuracy or completeness of the information and does not accept liability for errors or omissions. Any Commercial product should only be installed by a competent tradesperson and serviced/maintained by knowledgeable janitorial staff or competent people. Metlam Australia accepts no responsibility for any damage to product, walls or fixtures due to incorrect installation or maintenance of any of their products.