


Lawson Series Bathroom Accessories

Material Specifications

- #304 Stainless Steel
- Polished Stainless Steel Finish

Dimensions


ML6000PSS Single Toilet Roll Holder – 145mmW x 90mmH

x 85mmD 

ML6002PSS Single Toilet Roll Holder – 160mmW x 20mmH

x 85mmD 

ML6004PSS Double Toilet Roll Holder – 300mmW x

20mmH x 85mmD 

ML6008PSS Single Towel Bar – 620mmW x 20mmH x 95mmD (600mm C to C)

ML6012PSS Single Towel Bar – 770mmW x 20mmH x 95mmD (750mm C to C)

ML6016PSS Double Towel Bar – 620mmW x 20mmH x 145mmD (600mm C to C)

ML6018PSS Double Towel Bar – 70mmW x 20mmH x 145mmD (750mm C to C)

ML6022PSS Soap Dish – 180mmW x 20mmH x 95mmD

ML6026PSS Shelf – 320mmW x 20mmH x 95mmD (300mm C to C)


ML6028PSS Shelf – 470mmW x 20mmH x 95mmD (450mm C to C)

ML6032PSS Combined Shelf & Soap Dish – 320mmW x 20mmH x 95mmD (300mm C to C)

ML6034PSS Combined Shelf & Soap Dish – 470mmW x 20mmH x 95mmD (450mm C to C)

ML6036PSS Robe Hook – 48mmD x 20mmØ

ML6040PSS Towel Ring – 180mmH x 85mmD x 165mmØ

ML6044PSS Dress Trim – 5mmD x 32mmØ 

Installation Guidelines

1. Loosen Grub Screw (B) with Hex Key (C) from Mounting Support (A) and remove Ferrule (E).
2. Mark mounting position for single Mounting Support.
 - **Note:** For dual Mounting Support application, ensure that height positions are parallel and Centre to Centre measurements are correct.
3. Drill hole(s) in marked position(s). Insert Hard Wall Anchor (F) or another suitable fastener appropriate to the wall being affixed to.
 - **Note:** Use Optional Dress Trim (G) for soft wall fixture.



ML6000



ML6002



ML6004



ML6008 / ML6012



ML6016 / ML6018



ML6022



ML6026 / ML6028



ML6032 / ML6034



ML6036



ML6040




ML6044



This product is AS1428.1 compliant (accessible compliant) when installed in accordance with the guidelines.

The photographs and line drawings of the products presented above are representational only.
Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.

4. Insert Screw (D) into Ferrule (E) and tighten Screw (D) into Anchor (F) so that Ferrule (E) is secure to wall.
5. Position Mounting Support (A) and push onto Ferrule (E).
- **Note:** For dual Mounting Support application ensure that unit is parallel.
6. Secure unit by tightening Grub Screw (B).

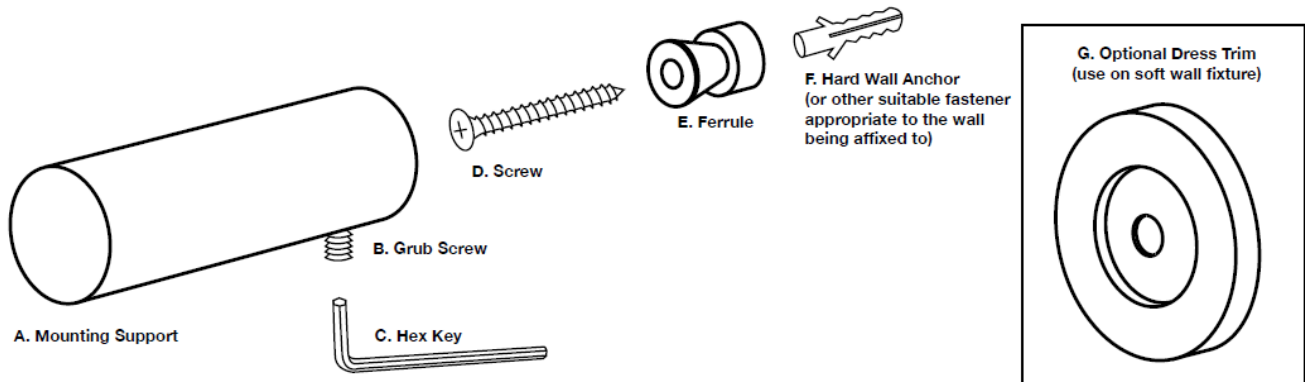

The technical recommendations contained in this document are necessarily of a general nature and should not be relied on for specific applications without first securing competent advice. Whilst Metlam Australia Pty Ltd has taken all reasonable steps to ensure the information contained herein is accurate and current, it does not warrant the accuracy or completeness of the information and does not accept liability for errors or omissions. Any Commercial product should only be installed by a competent tradesperson and serviced/maintained by knowledgeable janitorial staff or competent people. Metlam Australia accepts no responsibility for any damage to product, walls or fixtures due to incorrect installation or maintenance of any of their products.

The photographs and line drawings of the products presented above are representational only.
Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements in design and dimensions.