Information Sheet

ML4161 Coat Hook

Material Specifications
- #304 Stainless Steel

Mounting
- Concealed Screw Fix via Ferrule

Dimensions
- 20mmW x 35mmH x 55mmD

Finish
- Polished Stainless Steel

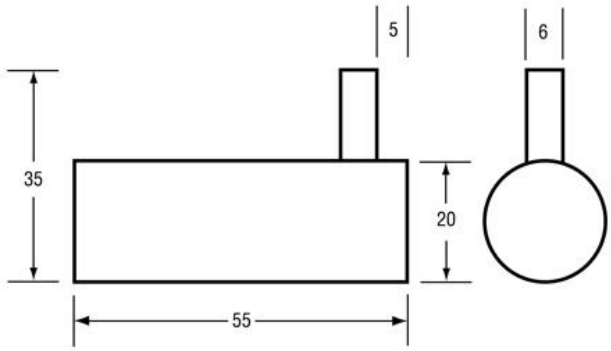

Installation Guidelines
- *May be subject to Australian Building Code Regulations for able bodied and/or disabled use. It is recommended that any individual unit is installed whereby it clears any other fixtures by at least 150mm and not carry loads any greater than 8kg.*
- **Note**: Use Dress Trim **ML6044PSS** for soft wall fixing.

1. Locate fixing position on wall or partition and mark the mounting position.
2. Drill 8mm hole and insert wall plug.
3. Remove grub screw with Allen key from hook. This will release the Insert (as shown)

4. Fit screw into the Insert (shown above) and then through the centre hole of Dress Trim.
5. Insert screw into wall plug and tighten.
6. Attach hook over insert and reinsert grub screw via Allen key and tighten.

This product is AS1428.1 compliant (accessible compliant) when installed in accordance with the guidelines.